

Pulsed Power Systems for ESS Klystrons

**Dr. Ian Roth¹, Dr. Marcel Gaudreau¹, Michael Kempkes¹, Rebecca Simpson¹
Jean Luc Lancelot², Julien Domenge²**

¹Diversified Technologies, Inc.
Bedford, MA, USA, 01730
www.divtecs.com

²SigmaPhi Electronics
Vannes, France
www.sigmaphi.fr

Abstract: *Diversified Technologies, Inc. (DTI), in partnership with SigmaPhi Electronics (SPE), has built three long pulse solid-state klystron transmitters to meet European Spallation Source (ESS) requirements. The prototype system was built under a DOE SBIR effort, and the first production modulators were built for, and installed at, CEA Saclay, Franc, and the National Institute of Nuclear and Particle Physics (IN2P3) in Orsay, France, where they will be used in support of RF component development and testing.*

Keywords: Klystron; European Spallation Source (ESS); Pulse Modulator

Introduction

Diversified Technologies, Inc. (DTI), in partnership with SigmaPhi Electronics (SPE), has designed and installed advanced, high voltage solid-state modulators for European Spallation Source (ESS) class klystron pulses (Figure 1). These klystron modulators use a series-switch driving a pulse transformer, with an advanced, patent-pending regulator to maintain a precise cathode voltage as well as a constant load to the external power grid. The success of the design in meeting the ESS pulse requirements (Table 1) is shown in Figure 2.

The DTI/SPE klystron modulator is now a fully proven design, delivering significant advantages in klystron performance through:

- Highly reliable operation, demonstrated in hundreds of systems worldwide, and predicted to significantly exceed ESS requirements
- Flicker- and droop-free operation over a range of operating parameters
- All active electronics in air for easy maintenance

With the delivery of these initial modulators, the transition to production for the ESS system itself is straightforward.

Design

The heart of the DTI/SPE modulator design is a high voltage solid-state switch driving a pulse transformer. The switch is made of seven series-connected IGBT modules, and operates at 6.7 kV. This design enables a measured modulator efficiency of 95.7%, primarily due to the fact that the peak power is only switched once per pulse (in contrast to a switching converter, where the peak power is switched at high frequency during the pulse). With a power

Table 1. ESS Klystron Modulator Requirements

Specification	
Voltage	-115 kV
Current	25 A per klystron
Pulse Width	3.5 ms
Frequency	14 Hz (max)
Average Power	160 kW (per klystron)
Droop	< 1%
Pulse Repeatability	< 0.1%



Figure 1. DTI's prototype solid-state ESS-class klystron modulator, developed under a DOE SBIR grant. This design is optimized for long pulse operation with highest possible reliability and availability required for particle accelerator user facilities and test stands.

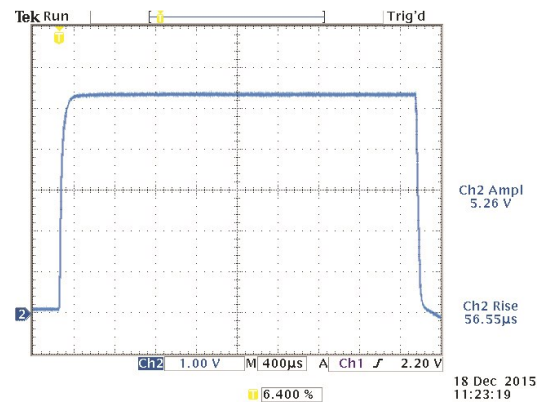


Figure 2. Modulator pulse at 108 kV, 3.5 ms, 0.07% flattop into a Thales TH2179A klystron during site acceptance testing at IN2P3, 18 December 2015.

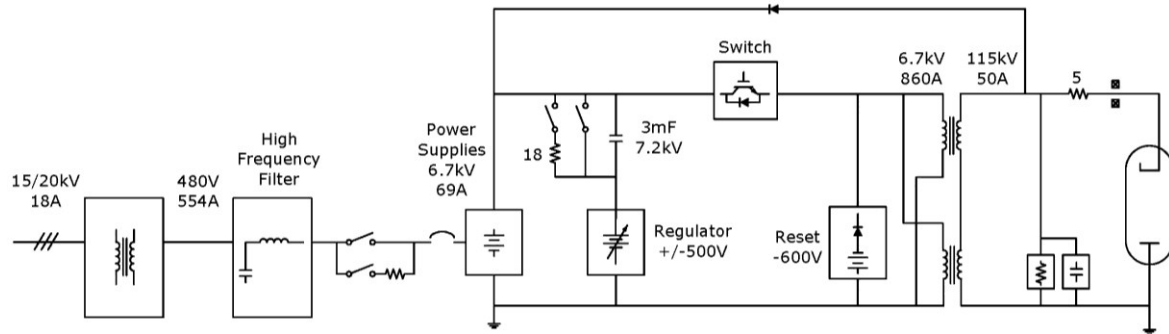


Figure 3. Simplified schematic of the complete transmitter. The turn-key system included all components up to the klystron.

supply efficiency of 96.9%, this gives an overall wall plug to cathode efficiency of 92.8%.

The IGBTs in the switch give N+2 redundancy, meaning two of seven can fail without affecting the ability of the switch to operate at full rated voltage. This is possible because the devices always fail as a short circuit. The series switch also protects the klystron from damage in the event of an arc by opening in less than 800 ns. This rapid opening time limits the dissipated energy from the modulator to 27 mJ, significantly extending the klystron lifetime. As soon as the arc extinguishes, the switch can reclose. Since the arc extinction time is well under 10 ms, this allows the modulator to resume operation before the next pulse.

Regulation

A capacitor bank capable of directly meeting the ESS pulse requirements would be unrealistically large and expensive. The DTI/SPE modulator has a much smaller capacitor, which droops by ~15% during a pulse. This droop is eliminated by the switching regulator shown in Figure 3. The regulator supplies only the droop voltage ($\pm 7.5\%$ of the output) rather than the full voltage (Figure 4). This means that the regulator can be small and efficient. The regulator operates in opposition to the variation in capacitor voltage, and produces both a flat output pulse and a constant load

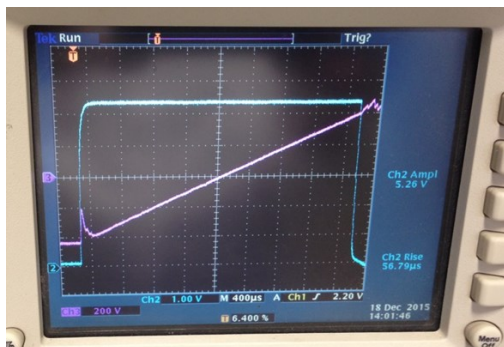


Figure 4. Regulator voltage during a klystron pulse. Ch 2 (blue) shows pulse voltage, 20 kV/div, 400 μ s/div. Ch 3 (pink) shows regulator voltage, 200V/div, 400 μ s/div. The pulse settles rapidly and remains extremely flat ($< 0.1\%$) over the long pulse flat top (3.5 ms).

voltage to the DC power supply. As a result, the power supply can operate at constant current and power – and thus does not produce flicker, regardless of the pulse frequency. Because the regulator sinks and sources the same energy during each pulse / charge cycle, the regulator itself is non-dissipative – it uses no net power over a cycle.

The regulator switches ~5% of the peak power via two full bridges in parallel. The IGBTs switch at 100 kHz during pulsing and 5 kHz during charging. Their switching is staggered, achieving an effective switching frequency of 200 kHz during pulsing. The switching transients are filtered by the output filter and the pulse transformer, producing a ripple of only 0.0015% peak-to-peak.

Pulse Transformer

The pulse transformer design is similar to that of a heavy-duty power distribution transformer. The cylindrical windings are on two core legs, with the primary windings closer to the core, and a single secondary winding around each primary. The primaries are connected in parallel, and the secondaries in series.

The low-loss silicon-steel core has a cruciform cross-section with five step sizes, giving a packing fraction of 90.6%. The core cross-sectional area and number of turns were chosen to give a flux swing of 3.4 T for the 110 kV, 3.6 ms pulse. The design is based on well-established criteria for the electric fields. To reduce the electric field at the ends of the windings, there are round field shapers. The transformer tank has voltage and current monitors, and a termination for the high voltage output cable.

Power Supplies

The high voltage DC supplies are commercial units designed by DTI. Nearly 100 of these have been successfully installed worldwide in large military and civilian radar and accelerator transmitters, operating in both shipboard and land-based systems, where reliability, high performance, and compact footprint are of the utmost importance. Each high voltage DC power supply is rated for 240 kW, with a demonstrated MTBF over 10 years, and regulation much better than 0.02%.